

## Article

# A Digital Twin Approach to City Block Renovation Using RES Technologies

Vytautas Bocullo <sup>1,\*</sup>, Linas Martišauskas <sup>2</sup>, Ramūnas Gatautis <sup>2</sup>, Otilija Vonžudaitė <sup>2</sup>, Rimantas Bakas <sup>2</sup>, Darius Milčius <sup>2</sup>, Rytis Venčaitis <sup>1</sup> and Darius Pupeikis <sup>1</sup>

<sup>1</sup> Centre for Smart Cities and Infrastructure, Kaunas University of Technology, Studentų g. 48, 51367 Kaunas, Lithuania

<sup>2</sup> Lithuanian Energy Institute, Breslaujos g. 3, 44403 Kaunas, Lithuania

\* Correspondence: vytautas.bocullo@ktu.lt

**Abstract:** The building sector accounts for over 40% of global energy consumption, and many buildings are old and inefficient. However, the current pace of building renovation is not sufficient to make a tangible impact. A new strategy is needed to accelerate the renovation process. Renovation at the district level and the use of digital tools, such as a digital twin (DT) of a city district, can provide a solution. This paper proposes a novel approach to city block renovation using renewable energy sources (RES), including photovoltaic (PV) solar panels, heat pumps (HP), and electric heaters (EH), while utilizing a DT of a city district to provide a user-friendly representation of the results and data needed for holistic solutions. The proposed method combines an optimization model of the optimal heating system with a solar PV simulation technique to analyse hybrid RES solutions and potential on-site energy generation and supply. Several scenarios are simulated to evaluate RES solutions in the renovation process of the city block using the DT concept. The simulation results demonstrate that a hybrid RES solution, which includes a PV system and a heating system, is optimal when the on-site generated energy is used not only for domestic electricity consumption, but also for the operation of HPs and EHs for heat generation. This study highlights the importance and significance of a DT approach to city block renovation and provides a new solution to accelerate the renovation process and reduce energy consumption in the building sector.

**Keywords:** deep renovation; city block; photovoltaic; heat pumps; digital twin; renewable energy sources; photogrammetry

**Citation:** Bocullo, V.; Martišauskas, L.; Gatautis, R.; Vonžudaitė, O.; Bakas, R.; Milčius, D.; Venčaitis, R.; Pupeikis, D. A Digital Twin Approach to City Block Renovation Using RES Technologies. *Sustainability* **2023**, *15*, 9307.

<https://doi.org/10.3390/su15129307>

Academic Editors: Samad Sepasgozar and Mohamed A. Mohamed

Received: 24 March 2023

Revised: 26 May 2023

Accepted: 6 June 2023

Published: 8 June 2023



**Copyright:** © 2023 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).

## 1. Introduction

### 1.1. Background

The European Union (EU) has set a target to diminish the release of greenhouse gas (GHG) emissions. Specifically, the EU aims to achieve a reduction of 40% by 2030 and 80% by 2050 compared to the emission levels recorded in 1990 [1]. Currently, the building sector accounts for over 40% of worldwide energy consumption and contributes to 30% of global GHG emissions [2]. A significant amount of energy is wasted in this sector, as most houses are not energy efficient. In Europe, more than 40% of buildings were constructed before 1960 and over 90% before 1990. The rates of replacement and extension for buildings are exceptionally low (~1% per year), and the annual reduction in energy consumption of buildings is approximately 1%. In order to accelerate the renovation rate in the EU, the European Commission has proposed in the “Renovation Wave Strategy”: the creation of zero-energy districts through the development of neighbourhood-based approaches and the integration of renewable solutions [3]. This strategy highlights the need to develop neighbourhood-based approaches and integrate renewable solutions to create zero-energy districts. Future generations of district heating (DH) systems should be based on

renewable energy and enable significant reductions in heating demand [4]. Renovation at the district level has the potential to reduce GHG emissions by optimizing the use of various renewable energy sources (RES), exploiting economies of scale, and reducing dependency on fossil fuels [5].

### *1.2. Application of Renewable Energy in District Heating*

For the building sector to achieve near-zero energy building status and reduce GHG emissions, the use of RES in conjunction with an energy storage system is strongly recommended [6]. Biomass fuels, heat pumps (HP), and solar energy are often considered for achieving a near-zero energy building status and reducing GHG emissions. Biomass fuel has gained popularity as an alternative to fossil fuels [7]. According to Raslavičius et al. [8], Lithuania has great potential for biomass utilization, as approximately 40% of the country's land area is covered by forests [9]. Among the industry sectors, sawmills and plywood manufacturers have emerged as the biggest producers of wood waste. Approximately 1.5 million m<sup>3</sup> of wood waste per year could be utilised as a valuable energy source. In Lithuania, where 57% of residents use DH, almost half of the heat for DH (47%) is obtained from biomass [9].

While the combustion of biomass fuels is typically perceived as having a carbon-neutral effect, an excessive reliance on their utilization can disrupt the delicate balance of the carbon cycle and contribute to an increased concentration of GHG in the atmosphere [7]. Forests play a critical role in the absorption of CO<sub>2</sub>, and deforestation for the purpose of biomass production reduces the capacity of CO<sub>2</sub> absorption. Therefore, broader implementation of RES is necessary to achieve a carbon-neutral DH system. Sandvall et al. [10] highlighted that the use of surplus urban heat can improve the competitiveness and profitability of DH systems compared to those with boilers.

Various types of heat pumps are considered highly promising alternative energy sources. Thygesen and Karlsson [11] compared the application of ground source and exhaust air HP, supplemented with a PV system, for near-zero energy buildings. The research concluded that the building with a ground source HP had the lowest specific energy demand and was considerably below what is considered the limit for near-zero energy building standards in Sweden. In addition, the ground source HP had a higher solar energy fraction compared to the system with exhaust air HP.

The study by Javanshir et al. [12] investigated the decarbonization of a Finnish city's DH through the use of power-to-heat technologies, such as HPs, an electric boiler, and thermal storage, in conjunction with a building deep-renovation program. The results showed that the power-to-heat technologies could not meet peak heat demand during the coldest periods without reducing the city's heat demand. However, the addition of thermal storage in one of the scenarios contributed to a 71% reduction in fossil fuel consumption [12]. A similar study conducted by Nazari et al. [13] concluded that the use of the PV system integrated with heat pumps could result in a reduction of up to 73% in CO<sub>2</sub> emissions.

Other studies have investigated alternative ways to use urban excess heat as a heat source. Khosravi et al. [14] examined the feasibility of using HPs and heat-only boilers to recover waste heat from a data centre and concluded that HPs are a cost-effective method for doing so. Hiltunen and Syri [15] used HP to enhance the temperature of waste heat and observed that waste heat recovery leads to a significant reduction in GHG emissions. However, the authors also found that the feasibility of waste heat recovery is highly dependent on the price of electricity. In addition, they concluded that, while waste heat recovery can reduce fossil fuel consumption, waste heat from data centres is not suitable for replacing fuel-burning heat-only boilers to meet peak demand.

However, to date, only a limited number of studies have been conducted on district-level renovation. In this context, there is a lack of systems thinking, which underscores the need to analyse new approaches that can provide a more holistic view with greater integrity and awareness of the priorities of different stakeholders in building renovations [16].

The previously described studies [7,10,12,14,16] have concluded that district-level renovation can be successful from an engineering perspective.

### *1.3. Social Obstacles Slowing Down Residential Building Renovation*

From a technical perspective, district-wide renovations can reduce the energy consumed by DH systems, but there are other factors that slow the pace of renovations. The implementation of such district-level renovations is highly dependent on social factors, such as support from stakeholders, including residents. Social factors such as a lack of understanding of renovation benefits, insufficient communication between stakeholders, and “Not-In-My-Backyard Syndrome” can cause negative perceptions about renovations and slow down the pace of their implementation. The willingness of tenants to participate in renovations is a crucial factor affecting the pace of renovations [17]. The lack of capital, reliable information, and uncertainties regarding the potential benefits frequently lead to the neglect of investments in energy efficiency measures [18]. Palm et al. [19] studied tenants’ response to renovation in Sweden and concluded that, while tenants generally have a positive attitude toward energy efficiency measures, their understanding of the specific benefits of different measures is not always comprehensive. Additionally, the tenants often prioritized immediate financial concerns over energy efficiency improvements. Research by Yang et al. [17] showed that residents demonstrated a positive inclination towards accepting fundamental renovation measures. However, they expressed a relative unwillingness to embrace measures focused on enhancing quality and integrating renewable energy sources.

Rose et al. [3] examined several case studies and concluded that it is possible to implement district-level renovations and achieve cost efficiencies while reducing energy use and GHG emissions. Their research emphasized importance of maintaining good communication amongst different stakeholders, especially with residents, who are often sceptical about renovations.

Liu et al. [20] concluded that information and policies are critical factors for renovations. A significant number of stakeholders demonstrated a lack of awareness regarding building energy efficiency and possessed limited knowledge and information regarding green building renovation. This situation was exacerbated by an imbalance of information among stakeholders and the absence of platforms (e.g., media, applications, networks) and collaborative activities that facilitated the sharing of information and experiences to promote renovation initiatives [20].

There is a need for a tool to share information among stakeholders and demonstrate the benefits of renovations in a user-friendly way. Information technology can be used for this task. A digital platform that displays a city district as a 3D model embedded with energy consumption profiles before and after the renovation can assist engineers responsible for implementing the renovation and also promote the idea to residents. Such a platform can combine energy production from RES and energy consumption data into a holistic system that provides important information for optimization and enable efficient operation [21].

### *1.4. Digital Twin Role in the Optimization of District Heating Systems*

Proper optimization of a DH system is the backbone for implementing fifth-generation district heating and cooling (5GDHC) systems. These systems, characterized by decentralized and bidirectional networks operating at ground-level temperatures, rely on the direct exchange of warm and cold return flows and thermal storage to achieve a balanced heat demand to the greatest extent possible [4]. These digital platforms can be various smart tools, such as the digital twin (DT), building information modelling (BIM), or geographic information system (GIS). The concept of DT has recently emerged in the field of civil engineering and has gained considerable attention in scholarly papers [22]. DT refers to a combination of different technologies, often including as-built models, BIM, and the Internet of Things, with the aim of creating a copy of the built environment with

specific characteristics. From a physical standpoint, the concept of DT can be employed across a range of domains, including buildings, cultural heritage, infrastructure, facilities and equipment, hydraulic engineering, and construction sites. The concept of a DT in deep renovation is a novel approach. While there are various tools available such as GIS or CityGML, they do not provide a holistic approach that is necessary for district-scale renovation. The DT should provide a single platform that can assist engineers in the design stage as well as present planned development to other stakeholders, such as residents.

Various GIS tools allow for the combination of a lifecycle assessment with renovations to increase sustainability and reduce GHG emissions. According to Jiang et al., a DT plays a crucial role in bridging the gap between physical and virtual components by establishing connections and integrating data. This is achieved through the capture of diverse data types, including point clouds, images, sensor data, and other forms, facilitated by a range of technologies and tools such as laser scans, sensors, digital image processing, and mobile devices. The collected data is then utilized to update both geometric and non-geometric information of virtual parts, enabling timely synchronization with their physical parts [23].

Camporeale and Mercader-Moyano proposed the use of GIS-based models as a spatial framework to manage different types of data and facilitate decision making in district renovations. The methodology developed in their study evaluates the energy flexibility of the district through energy demand reduction and photovoltaic (PV) generation. The results demonstrated the hourly load profile for heating and cooling of the building cluster, as well as the thermal comfort indices [24].

DTs provide novel approaches for the quantitative evaluation of urban energy demand and associated costs. The integration of energy consumption data into the DT of the built environment generates a highly valuable dataset, enabling automated and reliable energy demand diagnostics as well as simulations of renewable energy supply [24]. The recreation of the built environment and landscape enables accurate simulations where energy production scenarios can be evaluated. Machete et al. [25] found that the energy production of PV modules differs by approximately 30% when the built and natural environments are included. Weiler et al. [26] used a 3D City Geography Markup Language (CityGML) model and concluded that the main disadvantage of combining heat pumps with PV is that only 15% of the PV electricity is used directly by the HP. Anbari et al. [27] used 3D modelling of the built environment to efficiently place PV modules and predict wind speed using deep neural networks. In this model, power generation from wind and solar energy is combined so that energy companies can meet energy demand while reducing GHG emissions. According to Eicker et al. [28], 3D city models have the ability to simulate energy scenarios that assist urban planners and municipal managers in developing long-term urban energy strategies. The scenarios tested in DT can provide insight into how redevelopment will turn out [28].

The accurate site model not only allows for the simulation of potential energy generation with RES, but can also link generation with energy demand in the district, forming a single holistic system. Kohne et al. [29] conducted a case study on a DT model for an industrial heat transfer station connecting industrial heat networks with DH systems. The aim was to establish an effective integration of low-exergy waste heat from the production processes. The case study at an industrial site showed a significant potential for waste heat recovery, reaching up to 70% and leading to a substantial reduction in the operating costs of up to 6% [29].

There are several ways to create an accurate 3D model of a city or city district. DTs are often created based on open geospatial data and digital topographic maps. Machete et al. [25] employed a 3D GIS model created from a topographic map, aerial and satellite imagery to explore the impact of both the built environment and the topographic relief on the solar potential. Anbari et al. [27] used a built environment model based on CityGML and deep neural networks to determine the efficient placement of PV modules and predict wind speed. CityGML is an XML-based data model that facilitates the visualization, storage, and exchange of city models. It is used as an international standard for the exchange

of the spatial information published by the Open Geospatial Consortium. The DT was created with tools such as CityGML, which can increase the accuracy of the simulated scenarios. However, it does not possess the level of detail needed to accurately represent the built and natural environment. Haghghi et al. [30] used the CityGML format to generate a DT of the study area. This approach involved utilizing an open data model instead of traditional manual 3D modelling methods, allowing for more efficient energy simulations. The results indicated that the average use intensity of simulated heating energy deviated by less than 2.5% compared to the measured data. However, the authors concluded that using orthophotos alone to detect building heights leads to inaccuracies, particularly for objects and elements with tapering, sloping, or setback characteristics from the base. It is strongly recommended that urban geometry be improved using other complementary sources, if possible, in three dimensions, such as the LiDAR dataset or unmanned aerial vehicle (UAV) photogrammetry [30].

To simulate energy production from solar PV modules with greater accuracy, more precise data are required. Typically, topographic data include information about the shape of building structures and roofs, as well as the elevation index. Proximities, such as antennas, chimneys, heating, ventilation, air conditioning shafts, and others, can also cast shadows on PV modules. The shadow of a single column can reduce the available energy by up to 15–19% [31]. Therefore, it is crucial to assess the structure at a high level of detail to accurately predict energy generation from GIS. UAV photogrammetry can be a useful tool for creating the model of the built environment, which can later be augmented with BIM, GIS, energy consumption/generation data, and other features relevant to DT. Despite the growing attention given to the potential of DTs, there is limited knowledge about their development, the developers involved, and how design decisions related to DTs influence decision-making in the development of RES applications [32].

### 1.5. Objective and Contribution

The literature review revealed that there is currently limited application of DT technology in district-level renovations, particularly when RES is considered. While there is a potential for DTs to create a holistic platform for engineers and stakeholders to design and implement renovations, there is a lack of comprehensive research and studies on the development, utilization, and impact of DTs in the context of deep renovation and how DTs can effectively facilitate the integration of RES, communication, and decision-making processes among stakeholders in district-level renovations. Further research is needed to bridge this gap and explore the practical implementation, benefits, and challenges associated with the use of DTs in the context of district-level renovations and energy efficiency initiatives using RES technologies.

The main objective of this paper was to evaluate the potential for deep renovation, energy generation, and supply in buildings within an urban block to achieve CO<sub>2</sub> neutrality through the integration of RES technologies using a digital twin model. Generally, there are three main stages for DT applications: (1) the design phase, (2) operational phase (project implementation), and (3) service phase [33]. The design phase can be subcategorized into optimisation, data generation, and virtual evaluation. The focus of the study presented in this paper is on the design phase.

The novelty and contribution of the research presented in this paper includes several aspects:

1. Integration of RES technologies with a DT model.

The study proposes the integration of RES technologies, such as solar PV modules, heat pumps, and electric heaters with a DT model to achieve CO<sub>2</sub> neutrality in buildings within an urban block. While DT models have been used in various stages of building design and operation, this study specifically focused on the design phase and utilized a DT model to evaluate the potential for deep renovation and energy generation. By incorporating

energy parameters and data into the 3D model, the study provides a detailed analysis of options for electricity and heat supply using RES technologies.

## 2. New optimization technique.

The research employs a new optimization technique to select an optimal heat pump system by minimizing the associated costs and reducing GHG emissions. This optimization technique was combined with a solar PV simulation tool, enabling a holistic approach to evaluate hybrid RES solutions for the city block. By incorporating cost and emission considerations, the study provides a comprehensive assessment of the most suitable RES technologies for the given context.

## 3. Accurate 3D model and data.

The study utilizes an accurate 3D model of the entire city block, including residential buildings, kindergartens, and a school. This model allows for the estimation of shading from proximities and accurate calculation of the potential installed capacity of PV solar modules and PV on-site electricity generation. The heat saving potential was evaluated considering deep renovations of the buildings in the city block, including the installation of heat pumps and electric heaters. By using up-to-date data and advanced photogrammetry equipment, the research proposes more reliable energy consumption forecasts and better-informed decisions regarding supply and consumption technologies.

## 4. Elaboration of energy renovation projects.

The application of the developed methodology enables the elaboration of more accurate energy renovation projects for buildings using RES technologies. This contributes to mitigating technical and economic risks associated with such projects and reducing overall investments. By providing a detailed analysis of deep renovation possibilities and RES integration, the study offers valuable insights for stakeholders involved in urban block developments and sustainable energy planning.

The proposed method enables a more accurate estimation of on-site energy generation from RES. This represents a crucial first step towards the implementation of the 5GDHC, which aims to utilize RES to meet residual heating or cooling needs. The ability to create accurate 3D models of the entire city block and use them to accurately assess opportunities for building renovation and installation of RES has emerged due to the rapid development of photogrammetry equipment (e.g., using UAVs) and 3D digital model creation methods. Previously, such analysis relied on outdated paper-based technical plans of building construction, which usually differed from the actual situation. The same was true for the predicted and actual energy demand of buildings. After many years of constructing buildings, the technical parameters of buildings and consumer habits have also changed. Therefore, energy consumption forecasts based on up-to-date data allow for predicting future energy demand, selecting supply and consumption technologies, and increasing supply reliability more accurately in a way that is less harmful to the environment.

In summary, the novelty and contribution of this research lies in the integration of RES technologies with a DT model in the design phase, the use of a new optimization technique for selecting optimal RES solutions, the utilization of an accurate 3D model for detailed analysis, and the contribution to more accurate energy renovation projects. These unique aspects distinguish this study from previous works and contribute to the existing body of knowledge in the field of sustainable building design and energy planning. The proposed research on city block renovation using RES and a DT concept contributes to the theoretical understanding of integrating digital technologies with renewable energy systems and optimizing building energy systems. The practical implications include accelerating building renovation, reducing energy consumption, providing user-friendly representations of results, and enabling replicability and scalability of district-level renovation strategies.


The structure of this paper is as follows: the methodology used is outlined in Section 2. Section 3 introduces a description of the analysed scenarios and key assumptions used

in the simulation. The main results of the performed simulations are discussed in Section 4. Finally, the main findings of the conducted study are summarized in Section 5.

## 2. Methodology

### 2.1. Digital Twin Concept

In this paper, a DT was used as a measure to present the research findings. In particular, the DT of a city block was developed to accurately replicate the key features required to accurately predict energy consumption and simulate energy production. The methodological scheme of the proposed DT approach is illustrated in Figure 1.

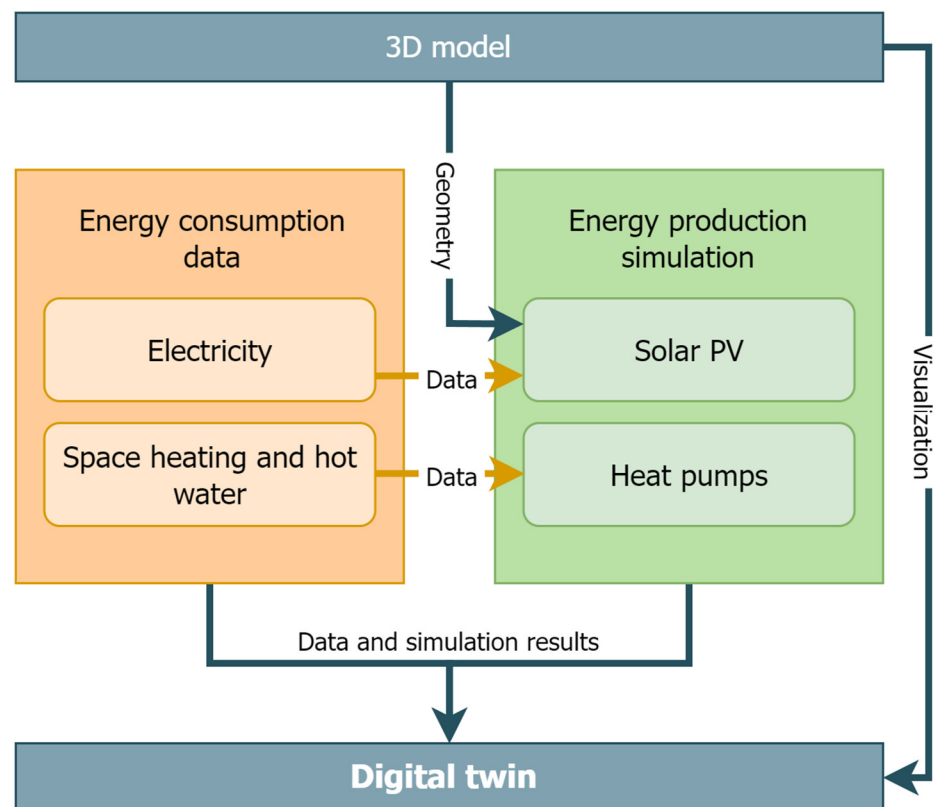

**Figure 1.** Methodological scheme of the digital twin.

Figure 1 depicts the three main blocks that were used to create the DT of the analysed city block: (1) a 3D model, (2) energy consumption data, and (3) an energy production simulation. The DT combined these blocks in a single system where an energy simulation can be performed based on real energy consumption data, and RES parameters can be selected for optimal performance.

The 3D model was created using UAV photogrammetry. The model was a 3D mesh representing the geometric features of a city block. The aerial photographs were taken with a DJI Mavic 2 Pro drone. The 3D model was created using Bentley Systems ContextCapture, which generates 3D terrain models from individual photographs using photogrammetry algorithms. The model was geolocated in the LKS 94 (EPSG:3346) coordinate system. The 3D model served two main purposes. Firstly, it determined the shading on PV modules caused by various proximities such as chimneys, aerials, trees, or other structures. Secondly, the 3D model provided a visual representation of the entire city block. The generated 3D terrain model was uploaded to Bentley OpenCitiesPlanner, where it was supplemented with energy consumption data and the results of the energy production simulation.

Since it was impossible to install real-time sensors in numerous private properties, historic data was used instead. The energy consumption data block included data on electricity consumption, space heating, and domestic hot water (DHW) preparation for the studied buildings in the city block. The quantities of space heating and DHW preparation (in kWh) were derived from energy consumption records of buildings in the analysed city block from 2011 to 2021. These records were obtained from meter readings from the residents of these buildings. This was possible because in Lithuania, energy consumption data are recorded each month for every property. These records provided historical data that showed how energy consumption had changed in the same building before and after renovation, allowing for an estimation of how energy consumption will change after the entire district is renovated. Electricity consumption (in kWh) was estimated using consumption profiles of apartment buildings, a school, and kindergartens in the analysed city block. Section 2.3 provides a more detailed explanation of the methodology and data preparation for energy consumption.

The integration of RES into the buildings of the analysed city block was assumed by including two types of energy production: electricity production with PV modules and space heating, and DHW production with heat pumps and electric heaters. The energy production simulation was based on data from the 3D model and the energy consumption data block. The 3D model provided essential data for solar PV energy production. The geometry allowed for the estimation of available roof areas for PV modules, as well as the shading effect. Solar energy production was simulated using the Prosumer Simulation Tool developed in the EU project [34]. The required amount of demanded electricity to be estimated from the electricity consumption stored in the energy consumption data block. The required capacity of heat pumps and electric heaters was estimated based on space heating and DHW consumption stored in the energy consumption data block. The optimal selection of HPs and EHs was determined using a mathematical optimization model. The methodology of the energy production simulation is discussed in more detail in Section 2.4.

## 2.2. Location

The analysed site was a typical residential district in Kaunas, Lithuania, at a terrain altitude of approximately 67 m above sea level. The site exhibited specific characteristics, including a PV power output of 1036 kWh/kWp per year, direct normal radiation of 960 kWh/m<sup>2</sup> per year, global horizontal radiation of 1031 kWh/m<sup>2</sup> per year, diffuse horizontal irradiation of 536 kWh/m<sup>2</sup> per year, and global tilted irradiation at an optimum angle of 1234.5 kWh/m<sup>2</sup> per year. The optimum tilt angle for PV modules is 38/180° [35].

The analysed city block has clear urban and city infrastructure boundaries, and a city renewal plan by blocks is already being implemented. A significant number of apartment buildings in the block have been renovated. Since the soviet-era apartment buildings followed standardized designs, it enables a fairly accurate assessment of the future electricity and heat requirements when all the buildings within the block are renovated.

The city block included 53 buildings, consisting of one school, four kindergartens, and 48 residential apartment buildings (1694 apartments). These buildings were constructed between 1957 and 1965, and this block was one of the first apartment blocks of typical soviet construction in Kaunas. It is a typical residential block for Kaunas City, consisting of the same infrastructure and buildings as most of the districts built in soviet era. This allows for the tested measures be applicable to other districts.

As of now, 31 apartment buildings have already been renovated, achieving an energy efficiency class of B-C (with only eight buildings reaching class B). Additionally, none of the buildings have renewable energy systems installed. The energy efficiency class for non-renovated apartment buildings is only E-F, and these buildings are currently undergoing a deep renovation process. The 3D model of the analysed city block is demonstrated in Figure 2.





**Figure 2.** Three-dimensional model representation of the buildings in the city block.

There were six types of residential buildings in the location. The main technical and structural parameters of all the buildings in the analysed city block are shown in Table 1.

**Table 1.** Parameters of buildings in the city block.

Building Type	Year of Construction	Heated Floor Area (m <sup>2</sup> )	Number of Storeys	Number of Apartments in Building	Number of Buildings of This Type in the City Block
Apartment Type I	1957–1962	718–730	4	16–18	17
Apartment Type II	1960–1962	1419–1443	4	31–32	13
Apartment Type III	1960–1963	1910–1950	4	43–48	5
Apartment Type IV	1961–1962	2873–2880	5	60–61	8
Apartment Type V	1961–1962	1218–1224	4	32	3
Apartment Type VI	1965	2640	9	108	2
School	1964	4051	1	–	1
Kindergarten I	1962	1015	2	–	1
Kindergarten II	1964	998	2	–	1
Kindergarten III	1961	777	2	–	1
Kindergarten IV	1961	791	2	–	1

### 2.3. Energy Consumption


#### 2.3.1. Electricity

The electricity balances for each building in the block and for the entire block were prepared. The electricity demand for household purposes and building operations was assessed, taking into account the requirement for corresponding amount of electricity to be supplied from the national power grid. In the case where a solar PV system is installed

in a building and electricity is produced on-site, the generated PV electricity is first used to meet domestic consumption, and the surplus is supplied to the distribution grid using the “virtual storage” service. In the case where a heating system with HPs and EHs is considered, the surplus of PV on-site generated electricity is used to power this system.

Electricity consumption (in kWh) was estimated using consumption profiles of apartment buildings, a school, and kindergartens in the analysed city block. Domestic electricity demand data for apartment buildings was prepared according to the electricity consumption of two types of families: senior families and families with children. The residents’ data records demonstrated that, on average, senior families consumed approximately 42% less electricity than families with children. The monthly electricity profile for each apartment building was prepared according to the hourly electricity consumption profile of residents on workdays and weekends, taking into account the number of apartments in each building. The data on electricity demand for the school and kindergartens was compiled based on the real hourly electricity consumption of the school averaged over the 2015–2020 period. This profile was also applied to the kindergartens based on the area of the building.

The electricity consumption profile for the entire city block was obtained based on the total electricity consumption of apartment buildings, the school, and kindergartens. The electricity consumption data for each month used in the simulation is presented in Figure 3.

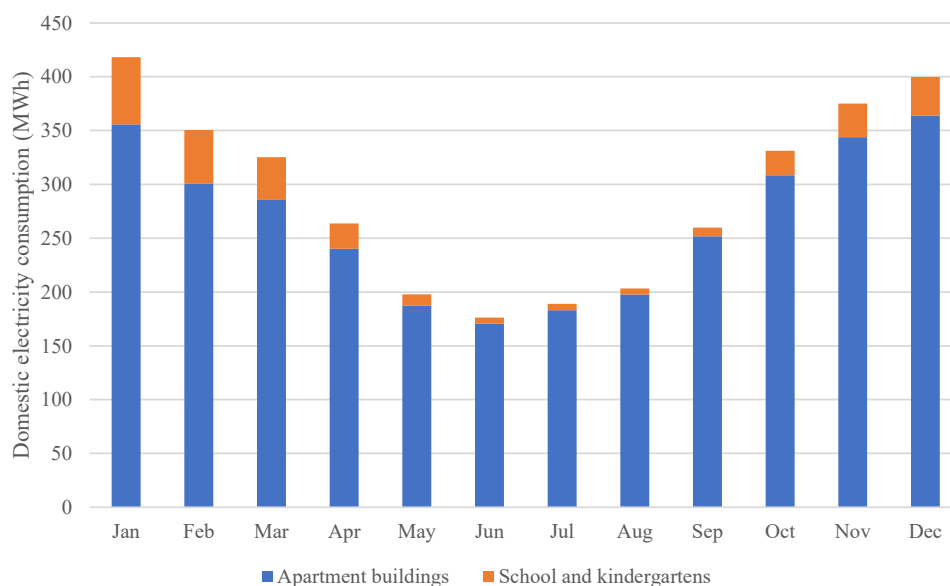

**Figure 3.** Domestic electricity consumption of buildings in the city block.

The total annual domestic electricity consumption of the city block was 3490 MWh. The majority of the electricity was consumed by apartment buildings (91.37%), while the remaining portion was used by the school and kindergartens (8.63%).

### 2.3.2. Heat

The heat demand for space heating and DHW was assessed for all buildings in the city block. Data on the monthly heat consumption of each building is publicly available on the website of the DH company AB “Kauno energija” [36].

#### Heat Consumption for Space Heating

Primary data on monthly heat consumption for space heating for each building during the period from January 2011 to August 2021 was collected. In this analysis, the data

was recalculated into the standard (average) year, where the heat consumption of each month was normalized by evaluating the number of degree days. The monthly degree days of the standard heating season were calculated based on the actual degree days of every month during the analysed period [37]. The current normalized amount of heat consumed in the buildings for space heating was determined to be 9763 MWh/year (per heating season). The heating season in Lithuania typically lasts from the 15th of October to the 15th of April.

A significant number of the apartment buildings in the city block had already been renovated, and renovation investment plans are currently being prepared for the remaining apartment buildings. The heat demand of the renovated buildings for space heating was determined by taking into account the level of consumption in the heating seasons after the renovation of the building. For the apartment buildings that had not been renovated, the heat consumption for space heating after the future renovation was determined as follows: since the design and heat consumption of the apartment buildings of the same type in the city block are very similar, it was assumed that, after renovation, the heat demand of the apartment buildings for space heating would be at the same level as the already renovated buildings of that type. It was determined that when the renovations of all buildings in the city block are completed, the heat demand for space heating will be 5530 MWh/year.

#### Heat Consumption for DHW Preparation

DHW is used for household needs (for example, showering and cooking) in apartment buildings and educational institutions. Data on actual DHW consumption in apartment buildings, obtained from the district heating company, demonstrated that DHW consumption is very stable every month throughout the year. Therefore, it was assumed that the heat demand for DHW preparation in apartment buildings will remain stable in the future. In almost all the buildings in the city block, the DHW was prepared in the buildings' substations using the heat supplied by the city's DH network. Before renovations, several apartment buildings prepared DHW individually using electricity and did not use the heat supplied by the DH network. After the renovation, the DHW was only prepared in the buildings' substations. It was assumed that, after the renovation, DHW would be prepared in the substations of the apartment buildings that had not yet been renovated. The heat consumed by DHW preparation in the educational institutions was determined according to the data published by the DH company. It was assumed that the consumption quantities and demand schedules would not change in the future. The heat demand for DHW preparation in the buildings in the city block amounted to 3463 MWh/year.

Table 2 presents the different building types in the analysed city block, along with their average annual heat demand. Due to slight variations in heated floor areas and the number of apartments within each building type (as shown in Table 1), the annual heat demands were averaged.

**Table 2.** Heat demand of buildings in the city block.

Building Type	Average Annual Heat Demand for Space Heating (MWh)		Average Annual Heat Demand for DHW Preparation (MWh)
	Before Renovation	After Renovation	
	Apartment Type I	96	
Apartment Type II	201	103	50
Apartment Type III	248	128	59

Apartment Type IV	242	154	167
Apartment Type V	160	82	50
Apartment Type VI	374	187	281
School	N/D	485	8
Kindergarten I	N/D	97	4
Kindergarten II	N/D	84	9
Kindergarten III	N/D	82	20
Kindergarten IV	N/D	83	10

In the energy production simulation, the annual heat demand included both space heating and DHW preparation, which amounted to 8993 MWh/year.

#### 2.4. Energy Production Simulation

##### 2.4.1. Electricity

The Prosumer Simulation Tool, developed during the EU Horizon2020 project iDistributedPV [34], was used for simulating solar PV electricity production. The tool is based on the simulation of the demand (including active demand response), solar PV power generation, and the use of Net-Metering protocols [38].

An economic assessment was performed based on the following criteria: the cost of the solutions, investments, and operation and maintenance costs; the rate of return of the solutions (solar PV units + storage devices + active demand management + control strategies and procedures), and the benefits that the system would yield from distributed solar PV: reduction in electricity losses, reduction in imported fossil fuel consumption, and mitigation of CO<sub>2</sub> emissions. The calculations of parameters considered in this paper, such as the payback period (PB), net present value (NPV), degree of self-sufficiency, and internal rate of return (IRR), are described in [39].

##### 2.4.2. Heat

The optimal heat pump system for each building in the city block was selected using a mathematical optimization model of mixed integer programming. External factors, geothermal, gas (hybrid), and air-to-water heat pumps with higher capacities were included in the analysis. The objective of the optimization model was to select a heat pump system for each building in the city block in order to minimize the annual cost of space heating and DHW production while also reducing GHG emissions. The main constraint of the optimization model was to meet the monthly basic heat demand for each building. Additionally, a heat consumption analysis was performed to assess peak heat consumption, which was met by auxiliary electric heaters.

The multi-objective optimization problem was solved using goal programming, which transforms a problem with two objective functions into a problem with a single objective function. Positive weights  $\alpha_1$  and  $\alpha_2$  that reflect the importance of the individual targets are introduced using a weighting method.

The multi-objective optimization problem is formulated as follows:

Min  $\{\alpha_1 d_1^+ + \alpha_2 d_2^+\}$ , subject to:

$$\sum_{i=1}^{25} \sum_{k=1}^{12} y_{ik} c_{ik} x_i + \sum_{i=1}^{25} \tilde{c}_i x_i + d_1^- - d_1^+ = 0; \quad (1)$$

$$\sum_{i=1}^{25} \sum_{k=1}^{12} y_{ik} \bar{c}_{ik} x_i + d_2^- - d_2^+ = 0; \quad (2)$$

$$\sum_{i=1}^{25} x_i y_{ik} q_{ik} \geq Q_k, k = 1, \dots, 12; \quad (3)$$

here:  $x_i, d_1^-, d_1^+, d_2^-, d_2^+ \geq 0, x_i \in \mathbb{Z}, 0 \leq y_{ik} \leq 1;$

- $i$ —index of the heat pump,  $i = 1, \dots, 25;$
- $k$ —index of the month,  $k = 1, \dots, 12;$
- $x_i$ —number of heat pump  $i$ ,  $x_i \in \mathbb{Z};$
- $y_{ik}$ —the proportion of maximum capacity that heat pump  $i$  operates in month  $k;$
- $c_{ik}$ —electricity or gas consumption costs of heat pump  $i$  in month  $k$ , assuming that the heat pump operates at full capacity every month (EUR);
- $\bar{c}_i$ —annual costs of heat pump  $i$  including its price, installation, and maintenance costs (EUR);
- $\bar{c}_{ik}$ —annual costs of CO<sub>2</sub> emissions of heat pump  $i$  in month  $k$  when the heat pump is operating at full capacity (EUR);
- $q_{ik}$ —maximum heat output of heat pump  $i$  in month  $k$  (kWh);
- $Q_k$ —basic heat demand in month  $k$  (kWh);
- $d_1^-, d_2^-$ —deviational variables that measure the underachievement of the target;
- $d_1^+, d_2^+$ —deviational variables that measure the overachievement of the target.

The optimization problem was solved using the Python programming language and the BARON solver [40]. The solutions obtained included the optimal heat pump system for each building in the city block.

### 3. Scenarios and Modelling Assumptions

#### 3.1. Description of Scenarios and Assumptions for Energy Prices

In this paper, a digital twin serves not only as a 3D digital representation of physical buildings, visualizing the geometrical features of a city block, but also as a tool of the physical system, effectively representing energy consumption data in these buildings. This capability enables the use of a digital twin in the simulation procedure. To implement this, a total of five scenarios were proposed to analyse decarbonization possibilities in heating and electricity systems when considering energy deep renovations of buildings in a city block.

In scenario 1 (further referred to as SC1), the installation of heat pumps and electric heaters is considered in each building in the analysed city block. The installed capacity of the heating system must satisfy the total demand for space heating and domestic hot water production in each building during the year (100% independence from the DH network). The source of electricity to power the heating system is the national power grid. Domestic electricity consumption is also satisfied by the power grid.

In scenario 2 (further referred to as SC2), the installation of PV modules is considered for the available rooftop areas in each building in the analysed city block. The potential of solar PV production is determined by the available space for PV modules on building rooftops. The electricity produced from the PV modules is used for domestic consumption, with any remaining demand being satisfied by the power grid.

Scenario 3 (further referred to as SC3) combines SC1 and SC2, where both heating and PV systems are installed, but they are assumed to operate independently with no interaction between them. The electricity from solar PV production is used solely for domestic consumption, with any remaining demand being satisfied by the power grid. Additionally, electricity to power HPs and EHs is supplied solely from the power grid.

In scenario 4 (further referred to as SC4), a hybrid system comprising of HPs, EHs, and PV modules is considered. The main difference from SC3 is that electricity from the solar production is used not only for domestic electricity consumption, but also to power

HPs and EHs. However, this electricity is used only for DHW production, not for space heating. The remaining part of electricity (domestic, HPs, and EHs consumption) is supplied from the power grid.

Similar to SC4, scenario 5 (further referred to as SC5) considers a hybrid system comprised of HPs, EHs, and PV modules. However, the key distinction from SC4 is that the electricity generated from solar PV system is used to power HPs and EHs for both DHW production and space heating. The remaining part of electricity (domestic, HPs, and EHs consumption) is supplied from the power grid.

The main characteristics of the proposed scenarios are outlined in Table 3.

**Table 3.** Description of the proposed scenarios.

Scenarios	Technologies	Electricity Supply Source
Scenario 1 (SC1)	HPs, EHs	Domestic—power grid
Scenario 2 (SC2)	PV	HPs and EHs—power grid
Scenario 3 (SC3)	HPs, EHs, PV	Domestic—PV and power grid
Scenario 4 (SC4)	HPs, EHs, PV	Domestic—PV and power grid
Scenario 5 (SC5)	HPs, EHs, PV	HPs and EHs—power grid

To take into account the drastic rise in energy prices in 2022, two cases were included for each scenario with different electricity and heat prices to reflect the situation (Table 4). Additionally, the electricity price in Lithuania was changed on 1 July 2022 as a result of the liberalization of the electricity market.

**Table 4.** Assumptions for electricity and heat prices.

Scenario Alternative (case)	Electricity Price (EUR/kWh)	Heat Price (EUR/kWh)
A	0.129	0.0429
B	0.240	0.0707

In Case A, the average prices of the previous five years 2022 (2017–2021) charged by electricity and heat suppliers were considered. In Case B, the electricity price in 2022 charged by electricity suppliers after the liberalization of the electricity market was taken into account [41]. The heat price in Case B was assumed to be on average 65% higher than in Case A, as set by the heat supplier in 2022 [42]. As a result, each analysed scenario was divided into two alternatives: SC\_A and SC\_B. Natural gas prices, set by UAB “Ignitis” in Lithuania, are used for both alternatives and are based on 2022 prices of 0.77 EUR/m<sup>3</sup> with a monthly fee of 3.99 EUR [43].

### 3.2. Assumptions for Electricity Production Simulation

Hypothetical solar PV panels with the following main parameters were used in the simulation: nominal power—250 W, total efficiency—15%, PV module size—1.7 m<sup>2</sup>, PV degradation rate per year—0.5%, estimated installation price based on current market prices—1000 EUR/kW. Instead of batteries, available Net-Metering protocols were used for the storage of the surplus electricity. A fixed payment of 0.054 EUR/kWh for stored and recovered electricity, as proposed by Lithuanian electricity distribution operator ESO, was used in the simulation [38].

### 3.3. Assumptions for Heat Production Simulation

In the analysis, various types of heat pumps, including geothermal, air-to-water, and hybrid models, were considered. A total of 25 heat pumps with varying capacities and coefficients of performance (COP) were analysed. The range of capacities was from 25 kW to 240 kW, and the COP range was from 3.7 to 4.8. The maximum values for capacity and COP were based on the specifications provided by the heat pump manufacturers. To

simplify the optimization model and reduce the computational time required for the simulations, the COP and capacity parameters of the heat pumps were assumed to be constant throughout the year. This assumption provided a reasonable approximation of the actual performance of heat pumps under typical operating conditions, given that their COP and capacity are relatively stable during the heating season. However, this assumption may not hold only under extreme weather conditions or for certain types of heat pumps, which were not applicable in this study. The annual cost of the heating system included the cost of the heat pump, its installation and maintenance, as well as the cost of electricity or gas consumption (operational costs).

It was assumed that the annual maintenance costs for gas and air-to-water heat pumps were 2% of the heat pump price, while for geothermal heat pumps, these costs were fixed at 950 EUR per year. When estimating the heating price over a 20-year period, a shorter warranty period for gas and air-to-water heat pumps was taken into account, assuming that they needed to be replaced after 10 years of operation. The second goal of the task (reduce GHG emissions) was achieved by introducing a tax of 80 EUR per tonne of CO<sub>2</sub> emissions and minimizing the total cost per year for emissions. A discount rate of 5% was used in the simulation.

#### 4. Results and Discussion

In this Section, the results of the conducted case study are presented for each of the analysed scenarios (Sections 4.1–4.5). Section 4.6 summarizes and compares the results of the scenario simulations over a 20-year period.

##### 4.1. Results of SC1

The optimization technique presented in Section 2.4.2 was applied to perform the optimization of heat pumps and electric heaters selection with the aim of minimizing costs and CO<sub>2</sub> emissions over a period of 20 years. The optimization was carried out separately for different types of buildings: apartment buildings, kindergartens, and a school. A summary of the main results of this analysis is presented in Table 5. Most of the parameters for both cases A and B are the same, with only the total costs and the Levelized Cost of Heat (LCOH) being different, which were affected by the assumed difference in electricity and heat prices in the modelling procedure.

Table 5. Optimization results of heating systems for different types of buildings.


Building Type	Number of Buildings	Annual Heat Demand (MWh)	Type of HPs	Installed Capacity of HPs (kW)	Installed Capacity of EHs (kW)	Investments per Analysed Period (EUR)	Scenario Alternative	Total Costs per Analysed Period (EUR)	LCOH (EUR/kWh)
Apartment type I	17	1287	Air-to-water	458	510	591,078	A	1,600,211	0.0622
							B	2,395,396	0.0931
Apartment type II	13	1989	Air-to-water	722	468	877,344	A	2,450,555	0.0616
							B	3,693,507	0.0929
Apartment type III	5	933	Air-to-water	330	450	377,060	A	995,760	0.0533
							B	1,480,719	0.0793
Apartment type IV	8	2569	Geothermal	846	1116	887,674	A	2,737,571	0.0533
							B	4,198,551	0.0817
Apartment type V	3	397	Air-to-water	137	189	174,210	A	483,654	0.0609
							B	728,546	0.0918
Apartment type VI	2	936	Geothermal	299	384	283,296	A	888,653	0.0475
							B	1,376,844	0.0735
Kindergarten	4	389	Air-to-water	147	218	187,500	A	496,726	0.0639
							B	739,881	0.0951
School	1	493	Geothermal	191	288	156,466	A	496,999	0.0504
							B	773,666	0.0785
Total per city block	53	8993	Air-to-water, Geothermal	3130	3623	3,534,628	A	10,150,129	0.0564
							B	15,387,110	0.0856



In the optimization, two types of heat pumps were selected: air-to-water and geothermal. Geothermal heat pumps with higher capacities were found to be optimal for larger buildings with higher heat demands (apartment buildings type IV, type VI, and the school). For other types of buildings, air-to-water heat pumps were determined to be the optimal solution. The total installed capacity of HPs for the different types of buildings in the entire city block ranged from 137 to 846 kW, primarily depending on the total heat demand of these buildings. The total installed capacity of HPs for the entire city block was 3.13 MW.

The installed capacity of EHs was determined based on the need to cover high peaks in heat demand over a short period of time. EHs are only used to cover these peaks to avoid the high installed capacity of HPs, which have comparatively higher investments. After the installation of the heating system, the average heat price for 20 years for the analysed city block was 0.0564 EUR/kWh in Case A and 0.0856 EUR/kWh in Case B. The lowest LCOH was achieved for nine-story apartment buildings (type VI), where the optimal solution was a geothermal HP. The determined solutions demonstrate that it is more cost-effective to install geothermal HPs in buildings with higher heat demands. Although these HPs require higher investments than air-to-water HPs, their lifetime is at least 20 years. In addition, because the ground temperature is more constant, geothermal HPs can operate efficiently even when the outside temperature is low, saving more energy for heating. The total costs for the city block over 20 years of operation were approximately 10.15M EUR in Case A and 15.39M EUR in Case B. These costs include the cost of the heating system and its installation, operation, and maintenance costs, as well as the cost of electricity to power HPs and EHs throughout 20 years of operation.

The technical performance of the analysed heating system is demonstrated by heat and DHW production. The results for the city block for each month of one year are shown in Figure 4.

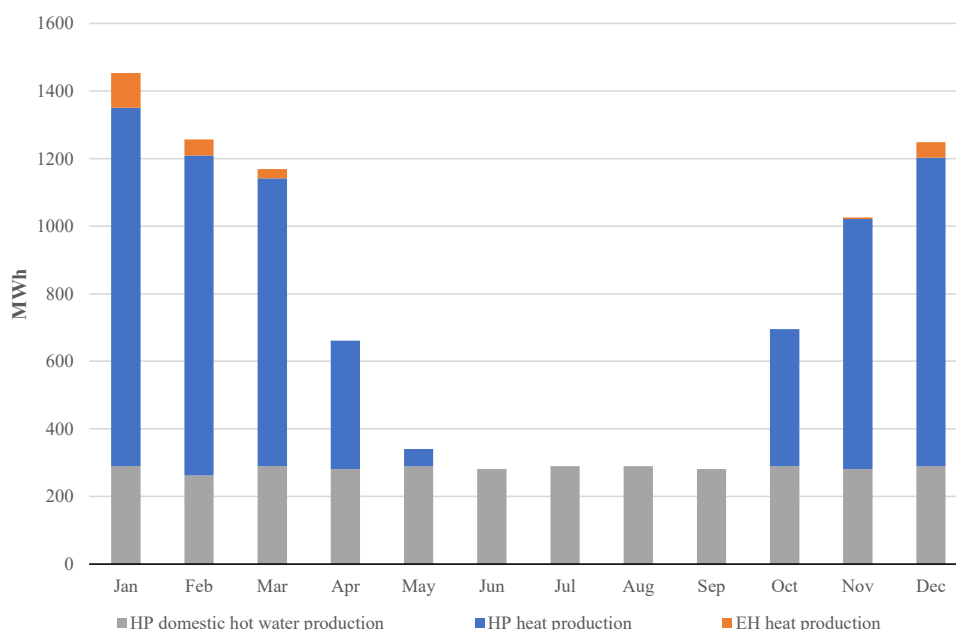

**Figure 4.** Monthly heat and domestic hot water production of the proposed heating system for the city block.

Monthly DHW production remains relatively constant throughout the year (approximately 290 MWh) and is fully covered by HPs. Space heating in the city block is required from October to May and is primarily produced by HPs. However, during the coldest months with the highest heat demand, EHs are used for a limited number of hours to

cover peaks in heat demand. For example, in January, when heat demand is highest, EHs were used 8.7% of the time.

The total investments over a 20-year period were approximately 3.53M EUR. This included the cost of the heating system, its installation, and the replacement of the air-to-water HPs and EHs after 10 years of operation due to their shorter lifetime. The operation and maintenance costs of the selected heating system over a 20-year period would amount to approximately 6.62M EUR in Case A and 11.86M EUR in Case B.

The financial parameters of the entire city block in both cases did not indicate that the proposed system would be profitable, and the payback period was not reached within the 20-year modelling period. The proposed heating system results in negative NPV (−2.42M and −2.28M EUR) and negative IRR (−5.74% and −4.83%) in cases A and B, respectively. The main reason for this was the relatively high LCOH of the installed system compared to the current average heat price provided by the heat supplier: 0.0564 vs. 0.0429 EUR in Case A and 0.0856 vs. 0.0707 EUR in Case B. To achieve a PB of the analysed system in seven years, an additional 82.24% and 80.01% of financing or external support would be required in cases A and B, respectively. This represents the cost of achieving 100% independence from the DH network and the ability to produce all the required heat on-site using HPs and EHs.

However, if DH prices continue to rise rapidly, this may significantly reduce the PB and improve the economic attractiveness of these projects in the near future.

#### 4.2. Results of SC2

In SC2, a simulation of a PV system for 20 years was performed using the Prosumer Simulation Tool presented in Section 2.4.1, and the assumptions were discussed in Section 3. The total installed capacity of 1882 kWp was determined based on the available rooftop space of all analysed buildings in the city block. Figure 5 illustrates the performance of the proposed PV system and domestic electricity consumption in the analysed city block. The technical performance of the PV system did not differ between cases A and B.

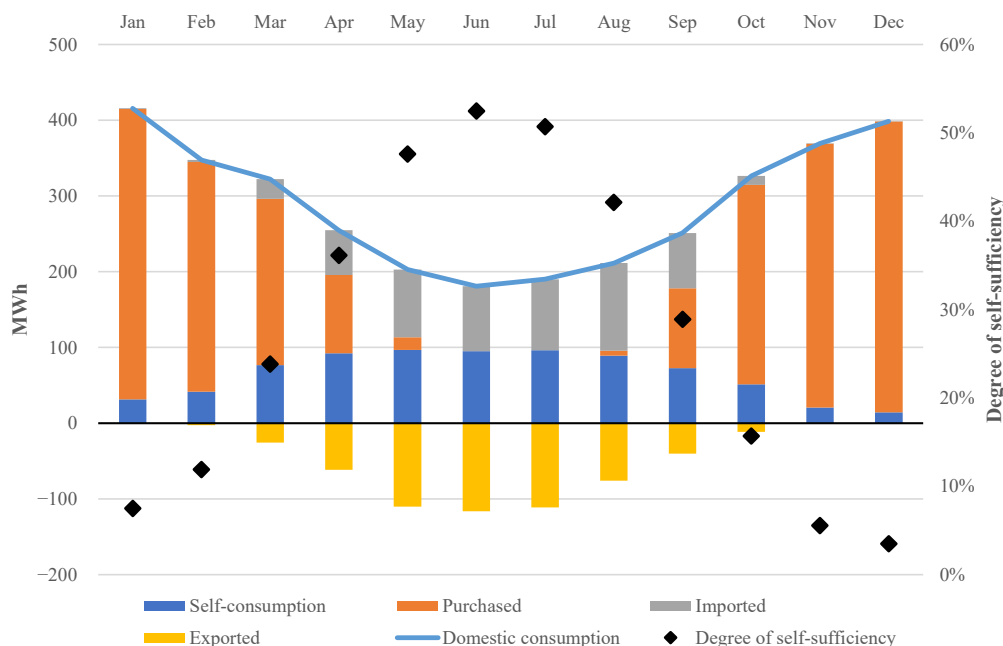


Figure 5. PV system electricity performance and consumption in SC2.

In Figure 5, the Self-consumption variable presents the amount of on-site PV-generated electricity that was consumed in the buildings instantaneously as it was being produced. If the electricity consumption was higher than PV production, the remaining

electricity was purchased and supplied from the grid (variable Purchased). If the electricity consumption was lower than PV production, the surplus PV-generated electricity was exported to the grid for storage (variable Exported). In this case, the grid served as a “virtual battery”, and the recovery of electricity depended on the net-metering strategy. If there was available electricity in the grid’s “virtual battery”, it could be imported (recovered) and consumed when consumption exceeded PV production (variable Imported). The domestic electricity consumption of the city block buildings was depicted using the variable Domestic consumption.

An important metric for evaluating the performance of a solar PV system is self-sufficiency, which measures the degree to which on-site generation is sufficient to fill the energy needs of a building [44]. A higher self-sufficiency value can increase the profitability of the PV system and reduce the load on the grid. The results of SC2 indicate that the average degree of self-sufficiency during the months of May to August was 48.22%, ranging from 42.12% in August to 52.47% in June. The annual degree of self-sufficiency for SC2 was 22.36%. Throughout June and July, no electricity needed to be purchased, as the consumption was met by PV generation and electricity that had been previously exported due to the storage of surplus PV generation stored in the grid. The total investments of the PV system were approximately 1.88M EUR, while the levelized cost of electricity (LCOE) was 0.1266 EUR/kWh.

Other financial indicators of the proposed PV system were highly dependent on the price of purchased electricity, resulting in vastly different outcomes for cases A and B. The PB for Case A was 14.69 years, whereas for Case B it was 7.12 years. To achieve a PB of seven years for the PV system in Case A, 51.45% additional incentives would be required, whereas for Case B, only 1.7% would be needed. A significant increase in the electricity prices would shorten the PB of the PV system and improve its overall financial performance. The NPV for Case A was negative (−294k EUR), while for Case B it was positive and substantial (1.36M EUR). The IRR also varied significantly between the two cases: 3.06% for Case A and 12.64% for Case B. A rise in electricity prices would make the PV system more financially attractive in the analysed city block, with shorter PB and higher returns.

#### 4.3. Results of SC3


In this scenario, only the financial results will be presented, as the technical performance of the heating and PV systems did not change when they were combined into a hybrid system without considering their interaction. The technical performance of these systems in this scenario was the same as the results of SC1 and SC2, as shown in Figures 4 and 5 and discussed above.

The results of SC3, in which a hybrid system is installed in the city block, revealed that the total investments were approximately 5.42M EUR. In Case A, the PB was not reached within the 20-year modelling period, while in Case B, the PB was 14.95 years. To achieve a PB of seven years, external financial support of 71.54% and 52.80% would be needed in Case A and Case B, respectively. The NPVs for both cases were negative, resulting in −2.71M EUR in Case A and −916k EUR in Case B. The IRR demonstrated a negative value of −2.06% in Case A and a positive value of 2.89% in Case B. However, in both cases, the IRR did not exceed the desired discount rate of 5%.

One way to enhance the economic performance of the hybrid system is to take into account the interaction between the heating and PV systems. This can be achieved by utilizing the excess PV-generated electricity to operate HPs and EHs for DHW production and space heating. The results of these two options are discussed in scenarios SC4 and SC5 below.

#### 4.4. Results of SC4

In this scenario, the domestic electricity consumption is supplemented by the electricity consumption of HPs and EHs for DHW production. Thus, Figure 6 demonstrates the results distributed across different parameters separately for domestic and HPs. When the installed heating system used electricity produced by the PV modules for DHW production, the self-sufficiency parameter compared to SC2 slightly decreased due to increased total consumption. The annual degree of self-sufficiency in SC4 was 21.16%.

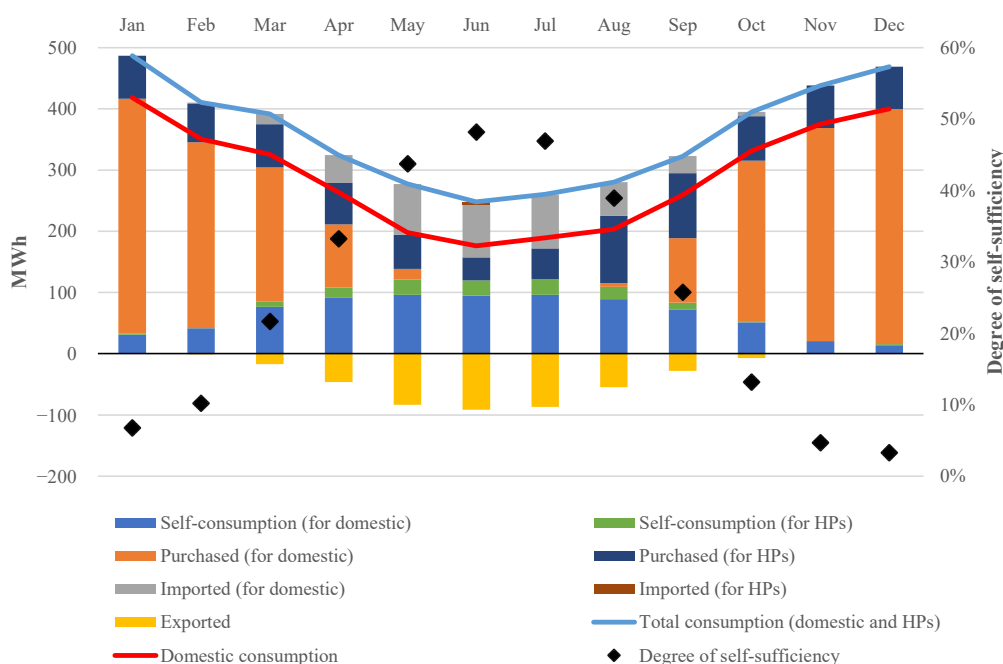

**Figure 6.** Hybrid system electricity performance and consumption in SC4.

However, self-consumption increased as a larger amount of on-site PV-generated electricity could be used not only to cover domestic electricity consumption but also to power HPs and EHs for DHW production. This reduced the amount of electricity exported to the grid and improved the economic performance of the hybrid system (Figure 6).


The results of the economic parameters were dependent on the case being analysed. The LCOH was lower than in SC1, at 0.0544 EUR/kWh in Case A and 0.0818 EUR/kWh in Case B. The LCOE remained at a very similar level as in SC2, at 0.1266 EUR/kWh and 0.1265 EUR/kWh in Case A and Case B, respectively.

Only Case B demonstrated a PB of less than 20 years, at 14.14 years. To reach a PB of seven years for this hybrid system, 69.49% and 50.18% of external financial support would be required in Case A and Case B, respectively. In both cases, negative NPVs were observed, resulting in −2.51M EUR in Case A and −678k EUR in Case B. The IRR in Case A was −1.43%, while in Case B it was 3.45%. Similar to SC3, in both cases, the IRR did not exceed the desired discount rate of 5%.

Slightly improved economic parameters were observed in SC4 compared to SC3, as some of the on-site PV-generated electricity could be used not only to cover domestic electricity demand, but also to power HPs and EHs for DHW production. This resulted in less electricity needing to be purchased from the supplier, leading to larger savings. However, this effect was more notable during the warmer months of the year (April–September), when PV modules generate surplus electricity (when consumption is lower than PV generation for a large amount of time).

#### 4.5. Results of SC5

In this scenario, HPs and EHs use electricity generated from PV not only for DHW production, but also for space heating. As a result, the total electricity consumption increased significantly, particularly during the colder months (October–March) when the heating demand was highest (Figure 7).

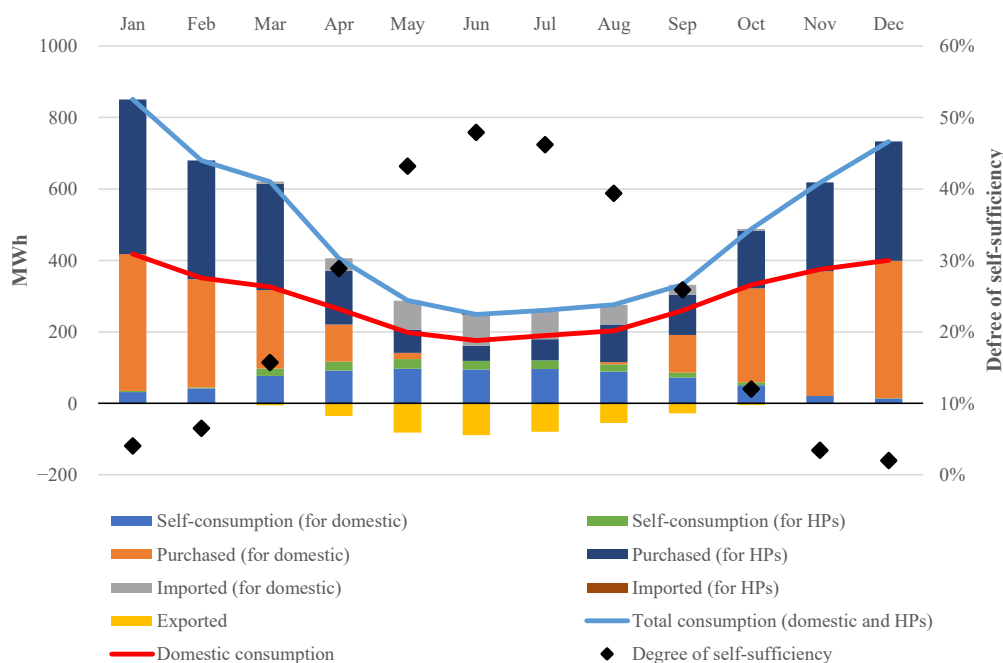

**Figure 7.** Hybrid system electricity performance and consumption in SC5.

The self-consumption parameter increased more than in SC4, as a larger amount of on-site generated PV electricity was used and less was exported to the grid, resulting in higher savings. However, self-sufficiency decreased significantly, particularly during the winter months, as the demand for electricity increased significantly due to the operation of HPs and EHs, which satisfy the heat demand independently of the heat network. The heat from the DH network was not used in this scenario. The annual degree of self-sufficiency in SC5 was 16.29%. During months when heat supply was not needed, the results were the same as in SC4.

The performance of the economic parameters in SC5 was slightly better than in SC4. The LCOH was 0.0539 EUR/kWh in Case A and 0.0809 EUR/kWh in Case B, while the LCOE remained similar to other scenarios at 0.1268 EUR/kWh and 0.1270 EUR/kWh in Case A and Case B, respectively.

The PB in Case B was 13.95 years, while in Case A it was not reached within the 20-year modelling period. Additionally, external financial support of 68.78% in Case A and 49.07% in Case B would be required to achieve a PB of seven years for this hybrid system. The NPV results were negative, similar to SC4, with −2.44M EUR in Case A and −582k EUR in Case B. The IRR also demonstrated similar results, with −1.23% in Case A and 3.68% in Case B, neither of which exceeded the desired discount rate of 5%.

The economic attractiveness of the hybrid system in SC5 was the best among the analysed scenarios. However, the main drawback of the analysed system was the significant mismatch between the highest on-site PV generation during summer months and the highest heat demand during winter months, resulting in minimal overlap. This led to a limited amount of PV-generated electricity available to power HPs and EHs for DHW production and space heating. Additionally, surplus PV-generated electricity must be exported and stored in the power grid, incurring additional costs due to the costs associated



Total installed PV capacity (kWe)	-	-	1882	1882	1882	1882	1882	1882	1882	1882
Investments (M EUR)	3.53	3.53	1.88	1.88	5.42	5.42	5.42	5.42	5.42	5.42
PB (years)	39.41	35.01	14.69	7.12	25.17	14.95	23.40	14.14	22.88	13.95
NPV (M EUR)	-2.42	-2.28	-2.94	1.36	-2.71	-0.916	-2.51	-0.678	-2.44	-0.582
IRR (%)	-5.74	-4.83	3.06	12.64	-2.06	2.89	-1.43	3.45	-1.23	3.68
Support level for a 7-year PP (%)	82.24	80.01	51.45	1.70	71.54	52.80	69.49	50.18	68.78	49.07
LCOE (EUR/kWh)	-	-	0.1266	0.1266	0.1266	0.1266	0.1266	0.1265	0.1268	0.1270
LCOH (EUR/kWh)	0.0564	0.0855	-	-	0.0564	0.0855	0.0544	0.0818	0.0539	0.0809
Degree of self-sufficiency	-	-	22.36	22.36	22.36	22.36	21.16	21.16	16.29	16.29
Produced heat by HPs and EHs, GWh	179.86	179.86	-	-	179.86	179.86	179.86	179.86	179.86	179.86
Produced electricity by PV (Solar production), GWh	-	-	26.62	26.62	26.62	26.62	26.62	26.62	26.62	26.62
Total installed capacity of HPs (kWh)	3130	3130	-	-	3130	3130	3130	3130	3130	3130

The economic scenario analysis revealed that parameters such as NPV, IRR, PB, and LCOH are sensitive to electricity and heat purchase prices, particularly when the installation of a PV system is considered. The hybrid system in SC5 demonstrated slightly higher absolute values of these parameters in comparison to SC3 and SC4 in both cases A and B. For example, in SC5\_A, the PB was 9.1% and 2.2% shorter than in SC3\_A and SC4\_A, respectively. The LCOH in SC5\_B was also lower by 5.4% compared to SC3\_B and 1.1% compared to SC4\_B. The difference between the other parameter values in SC5 and other scenarios can be seen in Table 6.

By introducing the integration of RES with a DT concept for city block renovation, this study provides an approach that combines two important domains in the field. While previous studies have explored RES solutions for buildings or digital twin applications in urban planning, this research offers a novel contribution by integrating these concepts and demonstrating their effectiveness in optimizing building energy systems. This aspect itself represents an advancement in the existing literature.

## 5. Conclusions

The decarbonization of urban areas is becoming increasingly important as cities strive to reduce their carbon footprint. This paper focused on the decarbonization possibilities of a city block in Kaunas, Lithuania, by considering deep renovations of block buildings and the use of RES, including the installation of PV modules and various types of heat pumps and electric heaters. Several scenarios, including stand-alone and hybrid systems for electricity and heat production, were examined to define the optimal solution to provide energy from RES on-site.

One of the main contributions of this study was the application of a digital twin, which provided a detailed 3D model of the city block. The DT recreated the essential features required to simulate energy consumption and production and present research results. The use of the DT enabled an accurate estimate of the shadows cast by proximities and the available roof areas for PV module installation, allowing for a more precise evaluation of on-site PV electricity production potential.

The main conclusions of this study are outlined as follows:

- An analysis of heat consumption data revealed that renovated buildings consume 43% less heat compared to those buildings that have not yet been renovated.
- Replacing the heat supply from the DH network with heat pumps and electric heaters is not a financially viable solution when renovating buildings in the city block. It

results in a relatively high LCOH compared to the average purchased heat price of the heat supplier, and the payback period is not reached within the lifetime of the installed heat system. To achieve a payback period of seven years, approximately 80% of external financial support would be required.

- Almost all heat demand for buildings in the city block was satisfied by heat pumps, while electric heaters were used only 1.3% of the time, satisfying 4.28% of peak heat demand.
- Installation of PV modules on building roofs is a viable solution, particularly in scenarios with high electricity prices. In this case, the payback period can be reached in seven years, while in scenarios with low electricity prices, the payback period is approximately 15 years.
- It is not possible to fully cover domestic electricity consumption solely from on-site PV generation. It can cover 22% of the domestic electricity needs of the buildings in the city block. The unevenness of PV generation varies greatly during the year, making the system dependent on the electricity “storage” service provided by the national grid.
- A combination of heat pumps and a PV system (a hybrid system) in the renovation process may be a viable solution for the city block to achieve full independence from the DH supply network. In this case, heat pumps and electric heaters would need to fully satisfy the demand for space heating and DHW production. However, the on-site PV-generated electricity would not be sufficient to fully meet the electricity needs of the heat pumps. Nevertheless, it would reduce the amount of electricity purchased from the supplier to power the heat pumps. This solution was found to be competitive both during the summer and the heating season by combining the installed heating system with the PV system.
- The hybrid system scenario, in which on-site PV-generated electricity is utilized to power heat pumps not only for DHW production but also for space heating, demonstrated the most favourable results. This case led to a payback of 13.95 years in the scenario with high prices, while in the scenario with low prices, it was not reached within the modelling period of 20 years. However, the annual degree of self-sufficiency in this hybrid system scenario decreased from 22.36% to 16.29% when compared to the stand-alone PV system.
- In terms of the economic attractiveness of the hybrid system, the best results compared to other scenarios analysed were obtained when the electricity generated from PV modules was utilized not only for domestic electricity consumption, but also to power heat pumps and electric heaters for both DHW production and space heating. This scenario resulted in a 9.1% shorter payback period and a 5.4% lower LCOH compared to the other scenarios.
- The application of the digital twin of the city block allowed for a more accurate analysis of solutions to provide electricity and heat to the buildings using RES technologies. The detailed 3D model enabled the estimation of shadows cast by proximities and the accurate calculation of available roof areas for PV module installation, allowing for a more accurate evaluation of on-site PV electricity production potential.
- The developed methodology can aid in the deep renovation of city blocks by considering the potential of RES technologies in buildings. The application of this methodology allows for the mitigation of emerging technical and economic risks associated with renovation projects and reduces initial investments.
- The findings demonstrate the advantages of district-scale renovations. The most beneficial scenario can be subsequently applied to district-scale renovations in the Baltic states and other Eastern European countries with similar city districts. The city blocks in this region were constructed in a similar manner, with comparable sizes, infrastructure, and construction periods.

The study has some limitations, and future research possibilities can be considered. It would be valuable to expand the scope of the study to include other cities with different climates and economic conditions. This will enable researchers to evaluate how the results



and conclusions of the study may differ in various contexts. Additionally, the study may benefit from an increased number of different heat pumps that are integrated into the optimization model, allowing for a more comprehensive analysis of their effectiveness in building renovations. Another potential area for research is the inclusion of batteries as backup systems for PV systems, which could provide additional insights into the potential benefits of this technology in the building renovation process.

Additionally, this study has certain limitations stemming from data availability, assumptions, and analysis techniques. Although the data utilized were generally reliable, as they were based on the actual energy consumption in buildings and an accurate 3D model, there may still be uncertainties in the results due to the assumptions made for the simulations. These assumptions may not fully capture the complexity of real-world scenarios, potentially resulting in discrepancies between the simulated and actual performance. Furthermore, it is important to note that assumptions regarding electricity and heat prices play a crucial role in determining the optimal RES solution and may lead to uncertainties in the results. However, this limitation was addressed in the study by creating two scenarios (Case A and Case B) with different energy prices to show that the prices affected the results significantly.

Overall, further research in this area has the potential to inform the development of more effective and sustainable building renovation strategies that leverage renewable energy sources.

**Author Contributions:** Conceptualization, V.B., L.M., R.G., R.B., D.M. and D.P.; methodology, V.B., L.M., R.G., O.V., R.B. and D.M.; software, V.B., L.M., O.V., D.M. and R.V.; formal analysis, V.B., L.M., R.G. and O.V.; investigation, V.B., L.M., R.G., O.V. and R.B.; resources, V.B., L.M., D.M., R.V. and D.P.; data curation, V.B., L.M., R.G., O.V., R.B. and R.V.; writing—original draft preparation, V.B., L.M., R.G., O.V. and D.M.; writing—review and editing, V.B., L.M., R.G., O.V., R.B. and D.M.; visualization, V.B., L.M., O.V. and R.V. All authors have read and agreed to the published version of the manuscript.

**Funding:** This research received no external funding.

**Institutional Review Board Statement:** Not applicable.

**Informed Consent Statement:** Not applicable.

**Data Availability Statement:** The data are not publicly available due to confidentiality.

**Conflicts of Interest:** The authors declare no conflict of interest.

## Abbreviations

5GHCS	5th Generation Heating and Cooling System
BIM	Building information modelling
CityGML	City Geography Markup Language
COP	Coefficient of Performance
DH	District heating
DHW	Domestic hot water
DT	Digital twin
EH	Electric heater
EU	European Union
EUR	Euro
GHG	Greenhouse gas
GIS	Geographic Information System
HP	Heat pump
IRR	Internal rate of return
LCOE	Levelized cost of electricity
LCOH	Levelized cost of heat
NPV	Net present value
PB	Payback period

PV	Photovoltaic
RES	Renewable energy sources
UAV	Unmanned aerial vehicle

## References

- Ur Rehman, H.; Hirvonen, J.; Jokisalo, J.; Kosonen, R.; Sirén, K. EU Emission Targets of 2050: Costs and CO<sub>2</sub> Emissions Comparison of Three Different Solar and Heat Pump-Based Community-Level District Heating Systems in Nordic Conditions. *Energies* **2020**, *13*, 4167. <https://doi.org/10.3390/en13164167>.
- Terés-Zubiaga, J.; Bolliger, R.; Almeida, M.G.; Barbosa, R.; Rose, J.; Thomsen, K.E.; Montero, E.; Briones-Llorente, R. Cost-Effective Building Renovation at District Level Combining Energy Efficiency & Renewables—Methodology Assessment Proposed in IEA-Annex 75 and a Demonstration Case Study. *Energy Build.* **2020**, *224*, 110280. <https://doi.org/10.1016/j.enbuild.2020.110280>.
- Rose, J.; Thomsen, K.E.; Domingo-Irigoyen, S.; Bolliger, R.; Venus, D.; Konstantinou, T.; Mlecnik, E.; Almeida, M.; Barbosa, R.; Terés-Zubiaga, J.; et al. Building Renovation at District Level—Lessons Learned from International Case Studies. *Sustain. Cities Soc.* **2021**, *72*, 103037. <https://doi.org/10.1016/j.scs.2021.103037>.
- Boesten, S.; Ivens, W.; Dekker, S.C.; Eijndems, H. 5th Generation District Heating and Cooling Systems as a Solution for Renewable Urban Thermal Energy Supply. *Adv. Geosci.* **2019**, *49*, 129–136. <https://doi.org/10.5194/ADGEO-49-129-2019>.
- European Commission. A Renovation Wave for Europe. Available online: [https://energy.ec.europa.eu/topics/energy-efficiency/energy-efficient-buildings/renovation-wave\\_en](https://energy.ec.europa.eu/topics/energy-efficiency/energy-efficient-buildings/renovation-wave_en) (accessed on 25 October 2022).
- Christopher, S.; Vikram, M.P.; Bakli, C.; Thakur, A.K.; Ma, Y.; Ma, Z.; Xu, H.; Cuce, P.M.; Cuce, E.; Singh, P. Renewable Energy Potential towards Attainment of Net-Zero Energy Buildings Status—A Critical Review. *J. Clean. Prod.* **2023**, *405*, 136942. <https://doi.org/10.1016/J.JCLEPRO.2023.136942>.
- Moradpoor, I.; Syri, S.; Hirvonen, J. Sustainable Heating Alternatives for 1960's and 1970's Renovated Apartment Buildings. *Clean. Environ. Syst.* **2022**, *6*, 100087. <https://doi.org/10.1016/J.CESYS.2022.100087>.
- Raslavičius, L.; Narbutas, L.; Šlančiauskas, A.; Džiugys, A.; Bazaras, Ž. The Districts of Lithuania with Low Heat Demand Density: A Chance for the Integration of Straw Biomass. *Renew. Sustain. Energy Rev.* **2012**, *16*, 3259–3269. <https://doi.org/10.1016/J.RSER.2012.02.060>.
- Jonynas, R.; Puida, E.; Poškas, R.; Paukštaitis, L.; Jouhara, H.; Gudzinskas, J.; Miliauskas, G.; Lukoševičius, V. Renewables for District Heating: The Case of Lithuania. *Energy* **2020**, *211*, 119064. <https://doi.org/10.1016/J.ENERGY.2020.119064>.
- Sandvall, A.; Hagberg, M.; Lygnerud, K. Modelling of Urban Excess Heat Use in District Heating Systems. *Energy Strategy Rev.* **2021**, *33*, 100594. <https://doi.org/10.1016/J.ESR.2020.100594>.
- Thygesen, R.; Karlsson, B. An Analysis on How Proposed Requirements for near Zero Energy Buildings Manages PV Electricity in Combination with Two Different Types of Heat Pumps and Its Policy Implications—A Swedish Example. *Energy Policy* **2017**, *101*, 10–19. <https://doi.org/10.1016/J.ENPOL.2016.11.025>.
- Javanshir, N.; Syri, S.; Teräsvirta, A.; Olkkonen, V. Abandoning Peat in a City District Heat System with Wind Power, Heat Pumps, and Heat Storage. *Energy Rep.* **2022**, *8*, 3051–3062. <https://doi.org/10.1016/j.egyr.2022.02.064>.
- Alhuyi Nazari, M.; Rungamornrat, J.; Prokop, L.; Blazek, V.; Misak, S.; Al-Bahrani, M.; Ahmadi, M.H. An Updated Review on Integration of Solar Photovoltaic Modules and Heat Pumps towards Decarbonization of Buildings. *Energy Sustain. Dev.* **2023**, *72*, 230–242. <https://doi.org/10.1016/J.ESD.2022.12.018>.
- Khosravi, A.; Laukkanen, T.; Vuorinen, V.; Syri, S. Waste Heat Recovery from a Data Centre and 5G Smart Poles for Low-Temperature District Heating Network. *Energy* **2021**, *218*, 119468. <https://doi.org/10.1016/J.ENERGY.2020.119468>.
- Hiltunen, P.; Syri, S. Low-Temperature Waste Heat Enabling Abandoning Coal in Espoo District Heating System. *Energy* **2021**, *231*, 120916. <https://doi.org/10.1016/J.ENERGY.2021.120916>.
- Kamari, A.; Corrao, R.; Kirkegaard, P.H. Sustainability Focused Decision-Making in Building Renovation. *Int. J. Sustain. Built Environ.* **2017**, *6*, 330–350. <https://doi.org/10.1016/j.ijbsbe.2017.05.001>.
- Yang, X.; Liu, S.; Ji, W.; Zhang, Q.; Eftekhari, M.; Shen, Y.; Yang, L.; Han, X. Issues and Challenges of Implementing Comprehensive Renovation at Aged Communities: A Case Study of Residents' Survey. *Energy Build.* **2021**, *249*, 111231. <https://doi.org/10.1016/j.enbuild.2021.111231>.
- Pardalis, G.; Mahapatra, K.; Mainali, B. Comparing Public- and Private-Driven One-Stop-Shops for Energy Renovations of Residential Buildings in Europe. *J. Clean. Prod.* **2022**, *365*, 132683. <https://doi.org/10.1016/j.jclepro.2022.132683>.
- Palm, J.; Reindl, K.; Ambrose, A. Understanding Tenants' Responses to Energy Efficiency Renovations in Public Housing in Sweden: From the Resigned to the Demanding. *Energy Rep.* **2020**, *6*, 2619–2626. <https://doi.org/10.1016/j.egyr.2020.09.020>.
- Liu, G.; Li, X.; Tan, Y.; Zhang, G. Building Green Retrofit in China: Policies, Barriers and Recommendations. *Energy Policy* **2020**, *139*, 111356. <https://doi.org/10.1016/j.enpol.2020.111356>.
- Buffa, S.; Cozzini, M.; D'Antoni, M.; Baratieri, M.; Fedrizzi, R. 5th Generation District Heating and Cooling Systems: A Review of Existing Cases in Europe. *Renew. Sustain. Energy Rev.* **2019**, *104*, 504–522. <https://doi.org/10.1016/J.RSER.2018.12.059>.
- Sepasgozar, S.M.E. Differentiating Digital Twin from Digital Shadow: Elucidating a Paradigm Shift to Expedite a Smart, Sustainable Built Environment. *Buildings* **2021**, *11*, 151. <https://doi.org/10.3390/BUILDINGS11040151>.
- Jiang, F.; Ma, L.; Broyd, T.; Chen, K. Digital Twin and Its Implementations in the Civil Engineering Sector. *Autom. Constr.* **2021**, *130*, 103838.

24. Camporeale, P.E.; Mercader-Moyano, P. A GIS-Based Methodology to Increase Energy Flexibility in Building Cluster through Deep Renovation: A Neighborhood in Seville. *Energy Build.* **2021**, *231*, 110573. <https://doi.org/10.1016/j.enbuild.2020.110573>.
25. Machete, R.; Falcão, A.P.; Gomes, M.G.; Moret Rodrigues, A. The Use of 3D GIS to Analyse the Influence of Urban Context on Buildings' Solar Energy Potential. *Energy Build.* **2018**, *177*, 290–302. <https://doi.org/10.1016/j.enbuild.2018.07.064>.
26. Weiler, V.; Stave, J.; Eicker, U. Renewable Energy Generation Scenarios Using 3D Urban Modeling Tools—Methodology for Heat Pump and Co-Generation Systems with Case Study Application. *Energies* **2019**, *12*, 403. <https://doi.org/10.3390/en12030403>.
27. Anbari, S.; Majidi, B.; Movaghar, A. 3D Modeling of Urban Environment for Efficient Renewable Energy Production in the Smart City. In Proceedings of the 2019 7th Iranian Joint Congress on Fuzzy and Intelligent Systems (CFIS 2019), Bojnord, Iran, 29–31 January 2019.
28. Eicker, U.; Nouvel, R.; Duminil, E.; Coors, V. Assessing Passive and Active Solar Energy Resources in Cities Using 3D City Models. *Energy Procedia* **2014**, *57*, 896–905.
29. Kohne, T.; Burkhardt, M.; Theisinger, L.; Weigold, M. Technical and Digital Twin Concept of an Industrial Heat Transfer Station for Low Exergy Waste Heat. *Procedia CIRP* **2021**, *104*, 223–228. <https://doi.org/10.1016/j.PROCIR.2021.11.038>.
30. HosseiniHaghighi, S.R.; de Uribarri, P.M.Á.; Padsala, R.; Eicker, U. Characterizing and Structuring Urban GIS Data for Housing Stock Energy Modelling and Retrofitting. *Energy Build.* **2022**, *256*, 111706. <https://doi.org/10.1016/J.ENBUILD.2021.111706>.
31. Trzmiel, G.; Głuchy, D.; Kurz, D. The Impact of Shading on the Exploitation of Photovoltaic Installations. *Renew. Energy* **2020**, *153*, 480–498. <https://doi.org/10.1016/j.renene.2020.02.010>.
32. Solman, H.; Kirkegaard, J.K.; Smits, M.; van Vliet, B.; Bush, S. Digital Twinning as an Act of Governance in the Wind Energy Sector. *Environ. Sci. Policy* **2022**, *127*, 272–279. <https://doi.org/10.1016/j.envsci.2021.10.027>.
33. Yu, W.; Patros, P.; Young, B.; Klinac, E.; Walmsley, T.G. Energy Digital Twin Technology for Industrial Energy Management: Classification, Challenges and Future. *Renew. Sustain. Energy Rev.* **2022**, *161*, 112407. <https://doi.org/10.1016/J.RSER.2022.112407>.
34. European Commission. Solar PV on the Distribution Grid: Smart Integrated Solutions of Distributed Generation Based on Solar PV, Energy Storage Devices and Active Demand Management (IDistributedPV) Project. Available online: <https://cordis.europa.eu/project/id/764452> (accessed on 25 October 2022).
35. The World Bank Group. Global Solar Atlas. Available online: <https://globalsolaratlas.info/map> (accessed on 25 October 2022).
36. District Heating Company AB “Kauno Energija”. Heat Consumption. Available online: <https://www.kaunoenergija.lt/silumos-suvartojimas-jusu-name> (accessed on 15 November 2022).
37. The Lithuanian District Heating Association. Heat Consumption. Available online: <https://lsta.lt/silumos-ukis/silumos-suvartojimas/> (accessed on 15 November 2022).
38. ESO. Prosumer Net-Metering Payment Methods. Available online: <https://www.eso.lt/lt/namams/elektra/tarifai-kainos-atsiskaitymas-ir-skolos/gaminanciu-vartotoju-kainos.html#!topic751> (accessed on 27 October 2022).
39. Aleksiejuk-Gawron, J.; Milčiuvienė, S.; Kiršienė, J.; Dohejio, E.; Garzon, D.; Urbonas, R.; Milčius, D. Net-Metering Compared to Battery-Based Electricity Storage in a Single-Case PV Application Study Considering the Lithuanian Context. *Energies* **2020**, *13*, 2286. <https://doi.org/10.3390/en13092286>.
40. Sahinidis, N.V. BARON: A general purpose global optimization software package. *J Glob Optim* **1996**, *8*, 201–205. <https://doi.org/10.1007/BF00138693>.
41. Ignitis. Electricity Tariffs. Available online: <https://ignitis.lt/en/electricity-home> (accessed on 25 October 2022).
42. Kaunas Energy. Heat Prices. Available online: <https://www.kaunoenergija.lt/silumos-kainos> (accessed on 26 October 2022).
43. Ignitis. Natural Gas Tariffs. Available online: <https://ignitis.lt/lt/dujos-namams> (accessed on 25 October 2022).
44. Luthander, R.; Widén, J.; Nilsson, D.; Palm, J. Photovoltaic Self-Consumption in Buildings: A Review. *Appl. Energy* **2015**, *142*, 80–94.

**Disclaimer/Publisher’s Note:** The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.