

Peering inside:

3D imaging in materials

New strong materials are in demand in many sectors, leading to the development of different hybrid structures. These can be made from dissimilar light materials such as aluminium alloys, which are joined by incorporating reinforcing fillers into the weld, or self-compacting fibre-reinforced concrete, which is reinforced using fibres. However, creating new materials is not without its problems. The process parameters can be imperfect or are affected by different variables or unforeseen circumstances. The quality of the structure can be affected and the performance of the loaded structure could be unexpected. To see how these different reinforcements influence the properties of materials, Prof Dr Elena Jasiūnienė, Ultrasound Research Institute, Kaunas University of Technology, uses X-ray computed tomography to allow her to peer inside the structures of materials and reconstruct them in three dimensions.

The idea of X-ray vision may have come from science fiction, but the ability to see into solid objects and take images of what is inside them is now very much a reality. One of the simplest forms of X-ray imaging is used in hospitals, to allow medical professionals to image bones and other dense tissues inside the patient. This produces a flat image where the densest areas are highlighted in white as they absorb the greatest amount of the incoming X-ray radiation.

Now, using more modern X-ray imaging methods, it is possible to image not just two-dimensional images of the inside of an object, but reconstruct

its contents in full three-dimensional detail. The ability is unique to X-ray computed tomography, an X-ray imaging technique that can be used on a wide variety of materials, including metals, biological structures and many complex materials, including hybrid structures such as concrete combined with steel or dissimilar metal joints with nanoparticle fillers.

The versatility and non-destructive nature of this approach is why Prof Dr Elena Jasiūnienė, Ultrasound Research Institute, Kaunas University of Technology, Lithuania has been taking advantage of the unique abilities of X-ray computed tomography to examine

The bulkhead and nosecone of the Orion spacecraft are joined using friction stir welding.




different ways of strengthening concrete and other lightweight, yet structurally strong, materials. X-ray computed tomography allows her to see how different kinds of processing to create these materials affect the structure and location and size of defects. All of this can be used to refine production methods and inspire approaches for the design of customised materials for specific applications.

LIGHTWEIGHT AND STRONG

Part of the increasing demand for strong materials that are still lightweight is motivated by attempts to decrease energy consumption. Lighter materials have several benefits as less energy is required to transport them and, if they are being used to make transport vehicles, it reduces their fuel demands too. A common way of achieving high strength while reducing weight is to make alloys, mixtures of two or more different materials. Aluminium alloys are very popular for this purpose but can be very hard to handle during construction as they are difficult to weld into structures using conventional welding techniques.

Some of this difficulty in the welding process results in inconsistencies and imperfections in the final weld on a microscopic scale. To identify such deficiencies, Prof Dr Jasiūnienė and her team used a combination of X-ray computed tomography and acoustic microscopy to investigate the invisible defects inside welds between different alloys. From the reconstructions of the three dimensional images of the inside of the welds, they could pinpoint exactly where the defects in the weld zones formed. The 3D capabilities of 3D tomography mean all of this can be done in real space and it is possible to resolve defects that would overlap with each other in more standard 2D imaging.

The small size of the nanoparticles, and the defects they can cause, make them very difficult to identify with other

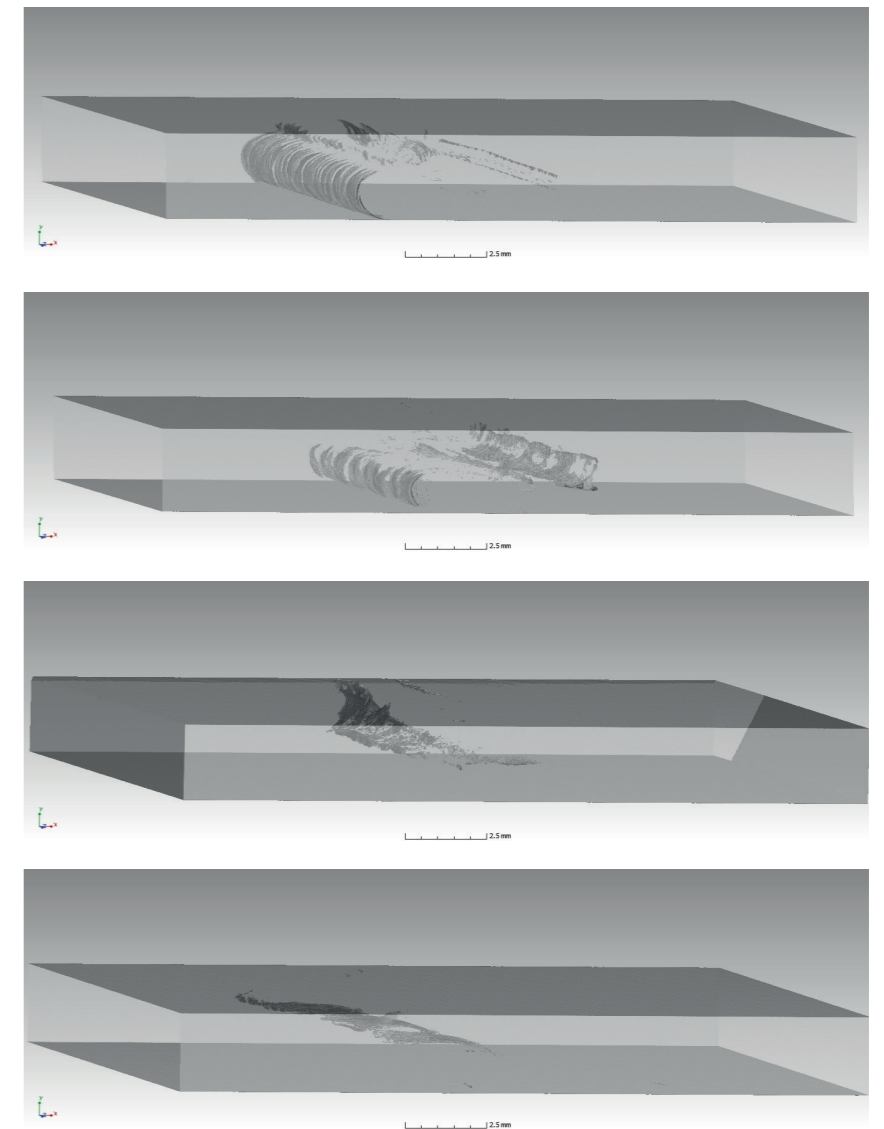

Defects formed in the inner structure of the samples friction stir welded by incorporating reinforcing fillers into the weld with different welding parameters: from top to bottom – after 1 pass, after 2 passes in the same direction, after 3 passes in the same direction; after 2 passes in opposite directions.

non-destructive imaging techniques. The non-destructive nature of the technique also means it is suitable for use on manufactured pieces that require checking and could potentially be done routinely to assess fatigue or accumulating damage.

SELF-COMPACTING CONCRETE

Concrete is a mixture of cement and a binder that is usually liquified with water. After the mixture is made, it remains in a gel-type form so it can be poured

into moulds and manipulated until it sets as a solid. While it is being poured, the concrete needs to be compacted so that all the air bubbles and voids in the structure are removed to ensure that there are no inhomogeneities in the structure of the concrete and it is as strong as required. This is achieved by using a steel probe to act as a continuous source of vibration while the concrete is being poured.

Self-compacting concrete eliminates the need for continuous vibration and typically has a higher strength for a given water, cement and binder ratio than the traditional form. One way of making self-compacting concrete is to include superplasticisers that help

It is possible to image not just 2D images of the insides of objects, but reconstruct their contents in full 3D detail.

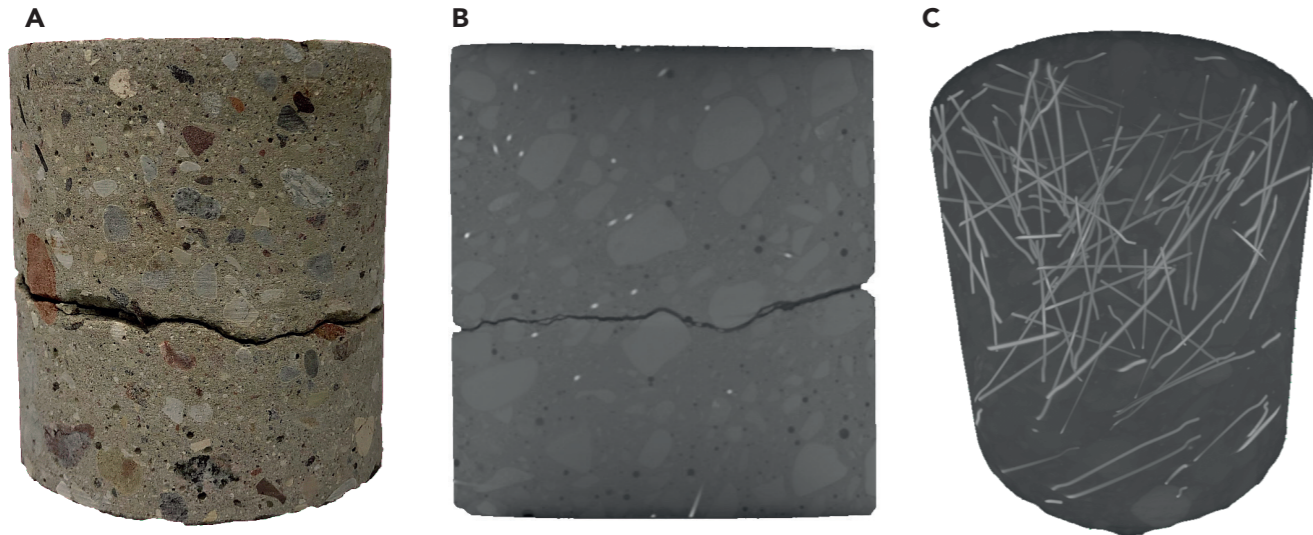


Image A shows a photo of the concrete cylinder sample, which was investigated. Image B shows a slice of 3D CT data in the middle of the sample. Image C reveals the 3D distribution of steel fibres within the self-compacting concrete.

it to be more elastic and flexible than normal concrete. By removing the need for vibration or tamping after pouring and as it also flows very well, self-compacting concrete is much less labour intensive to lay and can be used in areas where it is not possible to compact normal concrete or to create more complex shapes that would not otherwise be achievable.

One type of self-compacting concrete uses steel fibres, much as traditional concrete uses steel bars, to help reinforce the structure. However, it is difficult to know exactly how all of the fibres are aligned after the pouring process, even though the orientation of the fibres is critical in the amount

3D images of the inner structure allows quality evaluation of the different structures non-destructively – making the invisible visible.

of reinforcement strength the steel fibres will provide along different axes. Visualising the orientation of such fibres, given their small size, is the perfect problem for X-ray computed tomography as it can capture the full size, shape and relative orientation in 3D of the fibres in the concrete.

Prof Dr Jasiūnienė has been applying her expertise in X-ray computed

tomography to see how the flow-properties of the concrete influence the eventual orientation of the fibres. Her work has demonstrated that low viscosity concretes show the greatest amount of inhomogeneity in the steel fibre distribution after being poured but also that steel fibres orientate parallel to casting direction after some distance. Meanwhile in high viscosity concrete, fibres are distributed all over the beam more evenly, but they don't orientate parallel to casting direction as in low viscosity concrete.

LOOK INTO THE FUTURE

X-ray imaging tomography is a highly versatile, non-destructive technique that is widely used in engineering for its ability to recreate 3D images of the insides of many kinds of material. Prof Dr Jasiūnienė has been successfully able to use this to better understand the microscopic structure of metal alloys and concretes to help guide manufacturing decisions and reproducibility of the desired mechanical properties of such materials. In the future, she will continue to develop and apply tomography and related methods for the study of not just commonplace concrete, but also for materials used in space engineering and nuclear power plants.



Understanding the inner structure of concrete is essential to understanding its strength.



Behind the Research

Prof Dr Elena Jasiūnienė

E: elena.jasiuniene@ktu.lt T: +370 698 00899 W: <https://lt.linkedin.com/in/elena-jasiuniene-6a60082a>
W: <https://ultrasound.ktu.edu/ct/>

Research Objectives

Prof Dr Jasiūnienė investigates the properties of various materials, particularly self-compacting concrete, using X-ray computed tomography both alone and in conjunction with other methods.

Detail

Prof. Dr. Elena Jasiūnienė
Baršausko 59- A423
LT-51423 Kaunas
Lithuania

Bio

Elena Jasiūnienė received an Applied Electronics Masters degree and a PhD in Technological sciences, Measurements engineering, from Kaunas University of Technology. She later worked at the Federal Institute for Materials Research and Testing, Berlin, Germany. Currently she is Senior researcher at Prof. K. Baršauskas Ultrasound Research Institute and Professor at Department of Electronics Engineering, Faculty of Electrical and Electronics Engineering, Kaunas University of Technology.

Funding

- FP7 Collaborative project "SAFEJOINT". The abbreviation "SAFEJOINT" stands for "Enhancing structural efficiency through novel dissimilar material joining techniques" (Grant agreement no.: 310498)
- Kaunas University of Technology under grant agreement Nr.MTEPI-P-15010, project BeReTyr "Determination of Dispersive Reinforcement and Structural Defects in New Generation Concretes Using X-ray Micro Tomography"

Collaborators

- Dr Vaidotas Cicėnas, (Prof. K. Baršauskas Ultrasound Research Institute, Kaunas University of Technology)
- D.A. Dragatogiannis, E.P. Koumoulos, C.A. Charitidis (Research Unit of Advanced, Composite, Nano Materials & Nanotechnology, School of Chemical Engineering, National Technical University of Athens, Athens, Greece)
- Žymantas Rudžionis, Paulius Grigaliūnas (Faculty of civil engineering and architecture, Kaunas University of Technology)

References


Jasiūnienė, E., Žukauskas, E., Dragatogiannis, D.A., Koumoulos, E.P., Charitidis, E.A. (2017) Investigation of dissimilar metal joints with nanoparticle fillers. *NDT and E International*, 92, 122-129. Available at: <https://doi.org/10.1016/j.ndteint.2017.08.005>

Jasiūnienė, E., Cicėnas, V., Grigalinūnas, P., Rudžionis, Navickas, A.R., (2018) Influence of the rheological properties on the steel fibre distribution and orientation in self-compacting concrete. *Materials and Structures*, [online] 51(103), Available at: <https://link.springer.com/article/10.1617%2Fs11527-018-1231-y> [accessed 16 Nov 2018]

Personal Response

What other material and systems have you been investigating with X-ray imaging tomography?

Investigations of very different types of materials/ structures have been performed: investigation of the structure of 3D scaffolds for bone tissue regeneration; investigation of titanium pin array structure produced using additive manufacturing technology; human teeth for investigation of root canal transportation and centring ability of rotary endodontics instruments; visualisation of inner structure of microchips; investigation of the integrity of concrete in order to assess the harmful consequences of alkali-silica reaction on the composition of the material; investigation of glider longeron, made from CFRP to determine porosity.



prof. kazimieras
baršauskas ultrasound
research institute